



BELANKO™

NEED SOMETHING EXTRA ?

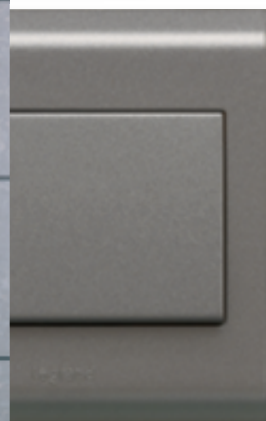

THE GLOBAL SPECIALIST IN ELECTRICAL
AND DIGITAL BUILDING INFRASTRUCTURES

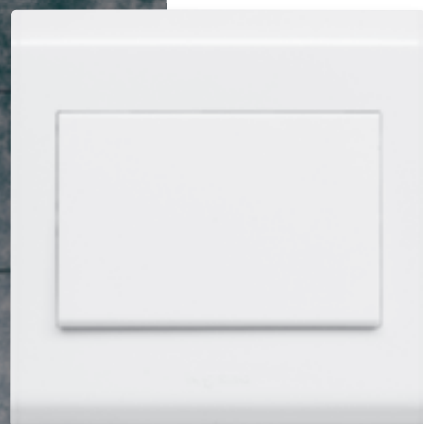

www.fengshengelectric.com.sg

SIMPLE REASONS TO SWITCH TO BELANKO™

WITH BELANKO™, SIMPLICITY IS BEAUTY.

Now discover **good reasons** why BELANKO™ should be your choice for wiring devices.





02

MODERN
FINISHES



04

IDEAL
CHOICE



06

MORE
FUNCTIONALITIES



12

WIDE
ASSORTMENT



14

EASY & SAFE
INSTALLATION



16

NEAT
PRESENTATION

..... **18** PRODUCT CATALOGUE



Each room in your home is unique and can change with the trends.

WITH 2 NEW FINISHES, DARK GREY & BROWN, BELANKO NOW OFFERS YOU MORE POSSIBILITIES TO CREATE A HARMONIOUS INTERIOR.



MODERN FINISHES

DISCOVER **NEW** COLOURS

TAILORED TO YOUR HOME INTERIOR

..... **TWO NEW COLOURS**




DARK GREY



BROWN

CHOOSE ELEGANT MINIMALISM...

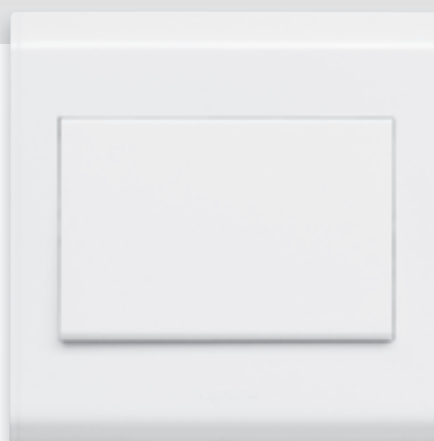

WHITE



**WITH BELANKO™,
SWITCHES PERFORM
EXACTLY THE WAY
YOU EXPECT THEM TO.**

Besides performance, Belanko™ now offers a little extra in terms of finishes: **3 full colour options** (White, Dark Grey, Brown) and **2 extra colour plates** (Beige and Taupe) in case you prefer to "mix & match".

**IDEAL
CHOICE**

IT'S YOUR CHOICE !

Either go with white finish, modern contemporary colours or colour plates.



CONTEMPORARY AND APPEALING
1 gang switch



AESTHETICS MEETS FUNCTION
4 gang switch



DARK GREY
1 gang intermediate switch



DELICATE BROWN
1 gang switch



SUBTLE BEIGE/ BROWN
2 gang switch and beige plate



DISTINCTIVE TAUPE/ WHITE
Double pole switch with red neon indicator and taupe plate



NEED SOMETHING EXTRA ?

For enhanced comfort, Belanko™ offers dimming solutions for complex lighting including dimmable LEDs and compact fluorescent lamps.



NEW UNIVERSAL DIMMER

ONE FOR ALL

THE NEW 300 W UNIVERSAL DIMMER WORKS FROM 100 V TO 240 V. It can be associated with push-buttons for ON/OFF control of light from another point in the installation.




WHITE




DARK GREY

COMPATIBLE WITH ALL TYPES OF LAMPS


Dimmable LEDs



Dimmable compact fluorescent lamps



Halogen with electronic or ferromagnetic transformer



Incandescent and halogen lamps



1000 W AND 1500 W DIMMERS

These 2-way Push ON/OFF Rotary dimmers can be associated with a switch for remote ON/OFF control from another point in the installation. They memorise the last light level set before switch-off. When switched on again, the light level will be restored as previously memorized.



1000 W DIMMER



1500 W DIMMER



VOLTAGE SELECTION


(FOR 1000 W AND 1500 W DIMMERS)

A rated voltage converting switch on the upper right part of the base allows you to select 230 V or 127 V. Factory setting is 230 V.

1500 W DIMMER

With the **1500 W dimmer**, upgrading existing installations is really easy. It can be fitted in either a 1 gang or a 2 gang box, so that there is no need to change boxes in case of retrofit.

IDEAL FOR
UPGRADE
OR RETROFIT

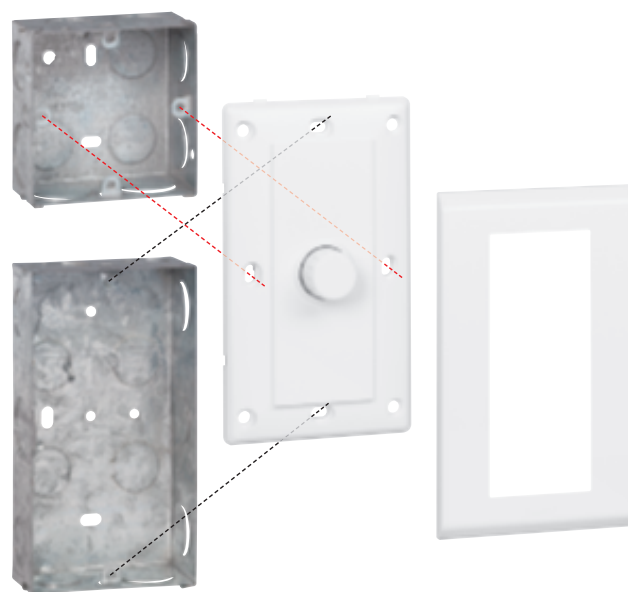

SHUTTER CONTROL

MOVE SHUTTERS
WITHOUT EFFORT.

Just by the push of a button.



■■■■■ CLEAR MARKING EASY IDENTIFICATION

BELANKO™ SHUTTER CONTROLS MAKE EVERYDAY LIFE EASIER, WHILE BLENDING IN PERFECTLY WITH THE OVERALL DESIGN OF THE RANGE.

For more convenience, a clear marking allows to easily identify their function.



Phones, tablets, power banks, smart watches...
your everyday connectivity needs are evolving.

OUR POWER SOCKETS FOLLOW SUIT.



BS 13A SOCKET + USB CHARGER 2.4A



THE TRADITIONAL POWER OUTLET IS COMBINED WITH A **2.4 A - 5 V_{DC} - 12 W USB CHARGING PORT.**

TWO IN ONE

This new BS 13 A socket with USB charger allows you to charge your mobile devices without blocking access to the power outlet. Just plug your USB cord straight in.



■■■■■ EASY INSTALLATION EASY UPGRADES



WHETHER FOR NEW INSTALLATIONS OR FOR RETROFIT:

The new BS 13 A socket with USB charger enhances any installation quickly and easily.

Fitted exactly like a traditional socket it's easy to install and offers a new function to meet increasing connectivity requirements.

WIDE ASSORTMENT

HOTEL DEDICATED FUNCTIONS FOR ENHANCED CUSTOMER COMFORT



1 gang multistandard switched socket outlet



Internal control unit



NEW

BS 13 A socket, switched, + USB charger 2.4 A



115/230 V
20 VA shaver socket



Key card switch

SAFE CONNECTION TO POWER IN DIFFERENT STANDARDS



13 A double pole BS socket outlet, switched
Whenever special safety is required



2P+E 16 A German standard socket outlet



2P+E 15 A US socket outlet



2 gang 13 A BS single pole socket outlet, switched, with inboard rockers

IP 44 PROTECTION



THE SPLASH-PROOF COVER
for socket protection:
ensures IP 44 with
or without plug engaged.

FUNCTIONS TO MEET YOUR EVERYDAY LIFESTYLE REQUIREMENTS



::NEW
1 gang 20 A double pole
switch without neon



2 gang 10 AX switch



3 gang 10 AX switch



4 gang 10 AX switch



::NEW
300 W universal
dimmer (RLC + LED)



Fan control




::NEW
1 gang push-button
without marking



Push-button with bell
symbol



::NEW
2 gang push-button
for electric shutters

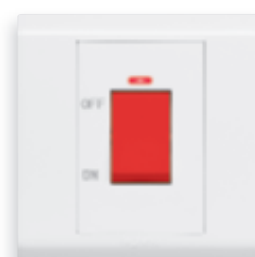

45 A double pole switch
+ red neon indicator



Single TV socket
"F" type



::NEW
RJ 11 + RJ 45 cat.6 tele-
phone and data socket



Fused connection unit



::NEW
BS 13 A socket,
unswitched + USB
charger 2.4 A



Double RJ 45 socket




**FITTING SWITCHES IS
PROBABLY ONLY ONE
OF THE MANY TASKS
you have to undertake.**


Ensuring installation is easy
and safe means you are left
with more time to tackle
other tasks.

EASY & SAFE INSTALLATION

■■■■■ The safety features of Belanko™ wiring devices make installation both easy and safe.

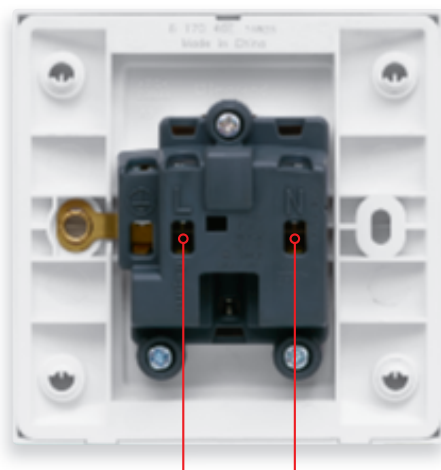


CLEAR MARKING OF TERMINALS
for easy identification and safe wiring

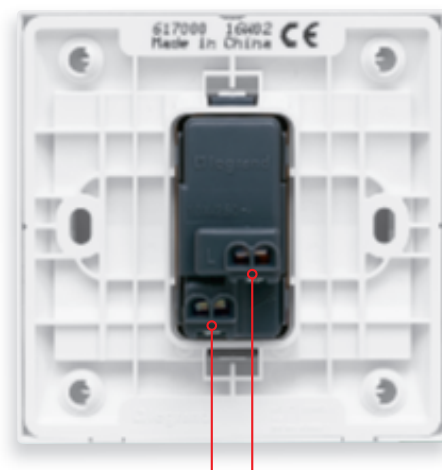

DOUBLE ENTRY
for each terminal facilitates wiring

WIRES ARE HELD IN PLACE WITH THE CLAMPING PLATE
This reduces the risk of damaging wires. The combination of double entry and clamping plate ensures long term reliability of the connection.

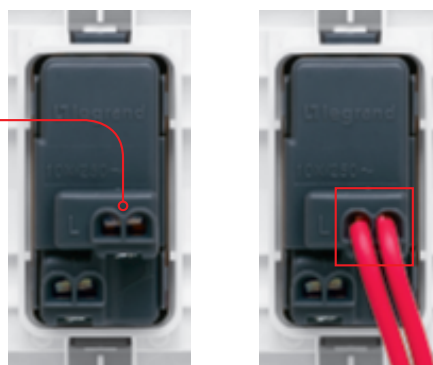

■■■■■ **CERTIFIED QUALITY**

YOUR SAFETY IS OUR TOP PRIORITY.
That's why Belanko™ wiring devices are compliant with safety standards.

Our **ISO 9001** certified production sites reflect Legrand's quality commitment, our constant spur to seek continuous improvement of our performance.





We know how important it is for professionals like you to deliver perfect installations fast - always.

Because your goal is also our goal, we ensure that our switches are always neatly wrapped with a soft protective film.

NEAT PRESENTATION

■ ■ ■ ■ ■ You now enjoy peace of mind.
Your switch stays clean
and neat until it is delivered
to the customer.



The soft protective film keeps the product safe from dust.































Only the soft protective film will get stained by the ongoing wall paintwork.





























The result is a perfectly neat installation - every time.

Belanko™ white and colours





selection chart








		Pack	 White	 Dark Grey	 Brown
SINGLE POLE SWITCHES 10 AX - 250 V\sim - SMALL ROCKER					
1 gang - 1-way switch		10	6 171 00	-	-
1 gang - 2-way switch		10	6 171 01	-	-
2 gang - 1-way switch		10	6 171 02	-	-
2 gang - 2-way switch		10	6 171 03	-	-
3 gang - 1-way switch		10	6 171 04	-	-
3 gang - 2-way switch		10	6 171 05	-	-
4 gang - 1-way switch		10	6 171 06	-	-
4 gang - 2-way switch		10	6 171 07	-	-
5 gang - 1-way switch		10	6 171 08	-	-
6 gang - 1-way switch		5	6 171 10	-	-
Intermediate switch		10	6 171 09	-	-
SINGLE POLE SWITCHES 10 AX - 250 V\sim - LARGE ROCKER					
1 gang - 1-way switch		10	6 170 00	6 173 00	6 174 00
1 gang - 2-way switch		10	6 170 01	6 173 01	6 174 01
2 gang - 1-way switch		10	6 170 02	6 173 02	6 174 02
2 gang - 2-way switch		10	6 170 03	6 173 03	6 174 03
3 gang - 1-way switch		10	6 170 04	6 173 04	6 174 04
3 gang - 2-way switch		10	6 170 05	6 173 05	6 174 05
4 gang - 1-way switch		10	6 170 06	6 173 06	6 174 06
4 gang - 2-way switch		10	6 170 07	6 173 07	6 174 07
Intermediate switch		10	6 170 09	6 173 09	6 174 09
SINGLE POLE SWITCHES 20 AX - 250 V\sim					
1 gang - 1-way switch		10	6 170 20	-	-
1 gang - 2-way switch		10	6 170 21	-	-
2 gang - 1-way switch		10	6 170 22	-	-
2 gang - 2-way switch		10	6 170 23	-	-
3 gang - 1-way switch		10	6 170 24	-	-
3 gang - 2-way switch		10	6 170 25	-	-
ARCHITRAVES					
1 gang - 1 way		5	6 171 15	-	-
Bell push		5	6 171 16	-	-
PUSH-BUTTONS 4 A - 250 V\sim - SMALL ROCKER					
Bell push		10	6 171 11	-	-
PUSH-BUTTONS 4 A - 250 V\sim - LARGE ROCKER					
1 gang without marking		10	6 170 10	6 173 10	6 174 10
Bell push		10	6 170 11	6 173 11	6 174 11
2 gang without marking		10	6 170 15	-	-
2 gang for electric shutters		10	6 170 16	6 173 16	6 174 16

		Pack	 White	 Dark Grey	 Brown
DOUBLE POLE SWITCHES 20 A - 250 V~					
1 gang - 1-way switch		10	6 170 73	6 173 73	6 174 73
1 gang - 1-way switch + red neon indicator		10	6 170 70	6 173 70	6 174 70
1 gang - 1-way switch + red neon indicator + earth connection		10	6 170 71	6 173 71	6 174 71
1 gang - 1-way switch + red neon indicator + earth connection with "Water Heater" marking		10	6 170 72	6 173 72	6 174 72
DOUBLE POLE SWITCHES 32 A - 250 V~					
1 gang - 1-way switch + red neon indicator, white rocker		10	6 170 74	6 173 74	6 174 74
DOUBLE POLE SWITCHES 45 A - 250 V~					
1 gang - 1-way switch		10	6 170 75	6 173 75	6 174 75
1 gang - 1-way switch + red neon indicator		10	6 170 76	6 173 76	6 174 76
2 gang - 1-way vertical switch + red neon indicator		10	6 170 77	6 173 77	6 174 77
COOKER CONTROL UNIT - 250 V					
45 A DP switch + red neon and 13 A BS switched socket outlet + red neon		5	6 170 78	6 173 78	6 174 78
DIMMERS					
600 W R dimmer (230 V only)		1	6 170 30	6 173 30	6 174 30
1000 W RL dimmer		1	6 170 31	6 173 31	6 174 31
1500 W RL dimmer		1	6 170 32	-	-
300 W RLC+LED dimmer		1	6 170 35	6 173 35	6 174 35
VENTILATION CONTROL					
Fan control 250 V~ - 50 Hz		1	6 170 33	-	-
TELEVISION SOCKETS					
Single TV socket, female		10	6 171 21	6 173 21	6 174 21
Single TV socket, "F" type		10	6 171 20	6 173 20	6 174 20
Double TV socket, female + "F" type		10	6 171 23	6 173 23	6 174 23
Double female TV socket		10	6 171 27	-	-
TELEPHONE SOCKETS					
Telephone connection block 10 connections		10	6 170 99	-	-
BS master		10	6 170 95	6 173 95	6 174 95
BS secondary		10	6 170 96	6 173 96	6 174 96
RJ 11 socket		10	6 170 97	6 173 97	6 174 97
Double RJ 11 socket		10	6 170 98	6 173 98	6 174 98

Belanko™ white and colours

selection chart (continued)

		Pack	 White	 Dark Grey	 Brown
TELEPHONE + DATA SOCKETS					
RJ 11 + RJ 45 Cat.5e UTP socket		10	6 170 94	-	-
RJ 11 + RJ 45 Cat.6 UTP socket		10	6 170 93	6 173 93	6 174 93
DATA SOCKETS					
RJ 45 Cat.5e UTP		10	6 170 90	-	-
RJ 45 Cat.6 UTP		10	6 170 91	6 173 91	6 174 91
Double RJ 45 Cat.6 UTP		10	6 170 92	6 173 92	6 174 92
KEY CARD SWITCH					
16 A - 230 V - 50 Hz		1	6 170 12	6 173 12	6 174 12
HOTEL ROOM CALL INDICATORS					
Indicator lamp + bell push		10	6 170 13	6 173 13	6 174 13
Internal control unit		10	6 170 14	6 173 14	6 174 14
SHAVER SOCKET					
115/230 V - 20 VA - 50/60 Hz		1	6 170 68	6 173 68	6 174 68
SECURITY SWITCH					
1 A resistive - 250 V~ Panic button		1	6 170 19	-	-
BRITISH STANDARD SOCKET OUTLETS 13 A - 250 V~					
1 gang single pole switched with external rocker		10	6 171 41	6 173 41	6 174 41
2 gang single pole switched with inboard rockers		5	6 171 46	6 173 46	6 174 46
1 gang single pole switched + USB charger Type-A 2.4 A		1	6 170 58	6 173 58	6 174 58
1 gang unswitched		10	6 170 40	6 173 40	6 174 40
2 gang unswitched		5	6 170 45	6 173 45	6 174 45
1 gang unswitched + USB charger Type-A 2.4 A		1	6 170 57	6 173 57	6 174 57
1 gang single pole switched		10	6 170 41	6 173 88	6 174 88
1 gang double pole switched		10	6 170 43	6 173 43	6 174 43
2 gang single pole switched		5	6 170 46	6 173 89	6 174 89
2 gang double pole switched		5	6 170 48	6 173 48	6 174 48
1 gang single pole switched + neon		10	6 170 42	6 173 42	6 174 42
2 gang single pole switched + neon		5	6 170 47	6 173 47	6 174 47
2 gang single pole switched with red cover + neon		5	6 170 49	-	-
BRITISH STANDARD SOCKET OUTLETS 15 A - 250 V~					
1 gang unswitched		10	6 170 50	6 173 50	6 174 50

		Pack	 White	 Dark Grey	 Brown
BRITISH STANDARD SOCKET OUTLETS 15 A - 250 V~ (CONTINUED)					
1 gang single pole switched		10	6 170 51	6 173 51	6 174 51
1 gang single pole switched + neon		10	6 170 52	6 173 52	6 174 52
2 gang single pole switched		5	6 170 53	6 173 53	6 174 53
BRITISH STANDARD SOCKET OUTLETS 5 A - 250 V~					
1 gang single pole switched		10	6 170 54	6 173 54	6 174 54
EURO/US SOCKET OUTLETS - 10 A - 250 V~ / 15 A - 127 V~					
1 gang - 2P		10	6 170 60	-	-
1 gang - 2P + 10 AX switch		10	6 170 61	6 173 61	6 174 61
1 gang - 2 x 2P		10	6 170 62	6 173 62	6 174 62
1 gang - 2P + E		10	6 170 63	-	-
1 gang - 2 x 2P + E		10	6 170 64	6 173 64	6 174 64
US SOCKET OUTLET - 15 A - 127 V~					
1 gang - 2P+E		10	6 170 65	-	-
GERMAN STANDARD SOCKET OUTLET 16 A - 250 V~					
1 gang - 2P+E with shutters for child protection		10	6 170 56	6 173 56	6 174 56
1 gang - 2P+E without shutters		10	6 170 55	-	-
MULTISTANDARD SWITCHED SOCKET OUTLET					
1 gang		10	6 170 67	6 173 67	6 174 67
2 gang		4	6 170 69	6 173 69	6 174 69
FUSED CONNECTION UNITS					
Unswitched + cord outlet		10	6 170 80	6 173 80	6 174 80
Switched + cord outlet		10	6 170 81	6 173 81	6 174 81
Switched + neon + cord outlet		10	6 170 82	6 173 82	6 174 82
CABLE OUTLETS					
20 A - 250 V~		10	6 170 85	6 173 85	6 174 85
45 A - 250 V~		10	6 170 86	6 173 86	6 174 86
BLANKING PLATES					
1 gang		10	6 171 28	6 173 28	6 174 28
2 gang		5	6 171 29	6 173 29	6 174 29
ARTEOR ADAPTOR					
1 gang		10	6 171 32	6 173 32	-

Belanko™

single pole switches and push-buttons



6 171 00



6 171 08



6 170 00



6 170 06



6 171 15

Colour: White T084

Material: Thermoplastic with glossy finish

Dimensions: 86 x 86 x 9.5 mm (1 gang) / 86 x 146 x 9.5 mm (2 gang)

Supplied with 2 screws M3.5 for BS boxes

Pack Cat.Nos Single pole switches 10 AX - 250 V~

Pack	Cat.Nos	Description
		Conform to BS EN 60669-1
		Small rocker
10	6 171 00	1 gang - 1-way switch
10	6 171 01	1 gang - 2-way switch
10	6 171 02	2 gang - 1-way switch
10	6 171 03	2 gang - 2-way switch
10	6 171 04	3 gang - 1-way switch
10	6 171 05	3 gang - 2-way switch
10	6 171 06	4 gang - 1-way switch
10	6 171 07	4 gang - 2-way switch
10	6 171 08	5 gang - 1-way switch
5	6 171 10	6 gang - 1-way switch
10	6 171 09	Intermediate switch
		Large rocker
10	6 170 00	1 gang - 1-way switch
10	6 170 01	1 gang - 2-way switch
10	6 170 02	2 gang - 1-way switch
10	6 170 03	2 gang - 2-way switch
10	6 170 04	3 gang - 1-way switch
10	6 170 05	3 gang - 2-way switch
10	6 170 06	4 gang - 1-way switch
10	6 170 07	4 gang - 2-way switch
10	6 170 09	Intermediate switch

Pack Cat.Nos Single pole switches 20 AX - 250 V~

Pack	Cat.Nos	Description
		Conform to BS EN 60669-1
		Large rocker
10	6 170 20	1 gang - 1-way
10	6 170 21	1 gang - 2-way
10	6 170 22	2 gang - 1-way
10	6 170 23	2 gang - 2-way
10	6 170 24	3 gang - 1-way
10	6 170 25	3 gang - 2-way
		Architraves
5	6 171 15	1 gang - 1-way
5	6 171 16	Bell push
		Push-buttons 4 A - 250 V~
		Conform to BS EN 60669-1
		Small rocker
10	6 171 11	Bell push
		Large rocker
10	6 170 10	1 gang without marking
10	6 170 11	Bell push
10	6 170 15	2 gang without marking
10	6 170 16	2 gang shutters push-button

Belanko™

double pole switches and cooker control unit



6 170 72

6 170 76

Colour: White T084

Material: Thermoplastic with glossy finish

Dimensions: 86 x 86 x 9.5 mm (1 gang) / 86 x 146 x 9.5 mm (2 gang)

Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	Double pole switches
10	6 170 73 N	20 A - 250 V~ 1 gang - 1 way switch
10	6 170 70	1 gang - 1-way switch + red neon indicator
10	6 170 71	1 gang - 1-way switch + red neon indicator + earth connection
10	6 170 72	1 gang - 1-way switch + red neon indicator + earth connection with "Water Heater" marking
10	6 170 74	32 A - 250 V~ 1 gang - 1-way switch + red neon indicator, white rocker
10	6 170 75	45 A - 250 V~ 1 gang - 1-way switch
10	6 170 76	1 gang - 1-way switch + red neon indicator
5	6 170 77	2 gang - 1-way vertical switch + red neon indicator
5	6 170 78	Cooker control Unit - 250 V 45 A double pole switch + red neon and 13 A BS switched socket outlet + red neon

Belanko™

dimmers and ventilation control



6 170 31

6 170 35

6 170 33

Colour: White T084

Material: Thermoplastic with glossy finish

Dimensions: 86 x 86 x 9.5 mm (1 gang) / 86 x 146 x 9.5 mm (2 gang)

Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	Dimmers
1	6 170 30	600 W R dimmer (230 V only) Rotary on/off dimmer - 50 Hz 1 gang - 1-way 40-600 W (230 V) for incandescent and halogen lamps
1	6 170 31	1000 W RL dimmer Push on/off and rotary dimmer - 50/60 Hz 1 gang - 2-way 60-1000 W (230 V) / 60-500 W (127 V) for incandescent and halogen lamps 60-600 VA (230 V) / 60-300 VA (127 V) for halogen lamps with electronic transformer with leading edge behaviour 60-1000 VA (230 V) / 60-500 VA (127 V) for halogen lamps with ferromagnetic transformers Slider at the back to select 230 V or 127 V
1	6 170 32	1500 W RL dimmer Push on/off and rotary dimmer - 50/60 Hz 1 gang - 2-way 60-1500 W (230 V) / 60-750 W (127 V) for incandescent and halogen lamps 60-900 VA (230 V) / 60-450 VA (127 V) for halogen lamps with electronic transformer with leading edge behaviour 60-1500 VA (230 V) / 60-750 VA (127 V) for halogen lamps with ferromagnetic transformers Can be mounted on 1 gang or 2 gang boxes Slider at the back to select 230 V or 127 V
1	6 170 35 N	300 W RLC+LED dimmer For all types of lamps: - dimmable LEDs: 5 W to 75 W (10 lamps max. 5 W to 37 W (127 V)) - dimmable compact fluorescent lamps: 5 W to 75 W (10 lamps max. 5 W to 37 W (127 V)) - halogen with ferromagnetic or electronic transformer: 5 VA to 300 VA / 5 VA to 150 VA (127 V) - fluorescent tube - ballast: 5 VA to 300 VA / 5 VA to 150 VA (127 V) - halogen and incandescent 240 VA: 5 W to 300 W / 5 W to 150 W (127 V) When switched on, gradually (2 seconds) lights up at the level set before last switch-off
1	6 170 33	Ventilation control Conform to BS EN 60669-1 Fan control 250 V~ 50 Hz

Belanko™

television, telephone and data sockets



6 171 21

6 170 97





6 170 92





Colour: White T084


Material: Thermoplastic with glossy finish




Dimensions: 86 x 86 x 9.5 mm (1 gang) / 86 x 146 x 9.5 mm (2 gang)

Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	Television sockets
10	6 171 21	 Single TV socket, female
10	6 171 20	 Single TV socket, "F" type
10	6 171 23	 Double TV socket, female + "F" type
10	6 171 27	 Double female TV socket

Pack	Cat.Nos	Telephone sockets
10	6 170 99	 Telephone connection block 10 connections
10	6 170 95	 BS master
10	6 170 96	
10	6 170 97	 RJ 11 socket
10	6 170 98	 Double RJ 11 socket

Pack	Cat.Nos	Telephone + data sockets
10	6 170 94	 RJ 11 + RJ 45 Cat.5e UTP socket
10	6 170 93	

Pack	Cat.Nos	Data sockets
10	6 170 90	 RJ 45 Cat.5e UTP
10	6 170 91	 RJ 45 Cat.6 UTP
10	6 170 92	 Double RJ 45 Cat.6 UTP

Belanko™

hotel equipment



6 170 12

6 170 13






6 170 68

Colour: White T084

Material: Thermoplastic with glossy finish

Dimensions: 86 x 86 x 9.5 mm (1 gang) / 86 x 146 x 9.5 mm (2 gang)

Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	Key card switch
1	6 170 12	 16 A - 230 V - 50 Hz Time delay of approx. 30 s after card removal
		Hotel bedrooms call indicators
		2 settings : - Do not disturb - Please clean the room
10	6 170 13	 Indicator lamp + bell push Installed in the corridor, display calls
10	6 170 14	 Internal control unit Installed in the room, allows the user to select the desired setting
		Shaver socket
1	6 170 68	 Conform to BS 61558 115/230 V - 20 VA - 50/60 Hz Surface or flush-mounting, back box to be min. 47 mm deep - 2 gang
		Security switch
1	6 170 19	 1 A resistive - 250 V~ Panic button

Belanko™

socket outlets



6 171 41



6 170 46



6 170 58



6 170 51

Colour: White T084. Material: Thermoplastic with glossy finish
 Dimensions: 86 x 86 x 9.5 mm (1 gang) / 86 x 146 x 9.5 mm (2 gang). Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	British Standard socket outlets - 13 A - 250 V~	Pack	Cat.Nos	British Standard socket outlets - 15 A - 250 V~
10	6 171 41	Conform to BS 1363-2 1 gang single pole switched with external rocker	10	6 170 50	Conform to BS 546 1 gang unswitched
5	6 171 46	2 gang single pole switched with inboard rockers	10	6 170 51	1 gang single pole switched
10	6 170 40	1 gang unswitched	10	6 170 52	1 gang single pole switched + neon
5	6 170 45	2 gang unswitched	5	6 170 53	2 gang single pole switched
10	6 170 41	1 gang single pole switched	10	6 170 54	Conform to BS 546 1 gang single pole switched
10	6 170 43	1 gang double pole switched			
5	6 170 46	2 gang single pole switched			
5	6 170 48	2 gang double pole switched			
10	6 170 42	1 gang single pole switched + neon			
5	6 170 47	2 gang single pole switched + neon			
5	6 170 49	2 gang single pole switched with red cover + neon			
		British Standard socket outlets - 13 A - 250 V~ with USB charger			
1	N 6 170 58	Conform to BS 1363-2:2016 Conform to IEC 60950-1 USB Type-A 2.4 A - 5 V _{DC} - 12 W Consumption in passive mode < 0.07 W 1 gang single pole switched			
1	6 170 57	1 gang unswitched			

Belanko™

socket outlets (continued)



6 170 60



6 170 65



6 170 67



6 170 69

Colour: White T084. Material: Thermoplastic with glossy finish

Dimensions: 86 x 86 x 9.5 mm (1 gang) / 86 x 146 x 9.5 mm (2 gang). Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	Euro/US socket outlets - 10 A - 250 V~ / 15 A - 127 V~
10	6 170 60	1 gang - 2P
10	6 170 61	1 gang - 2P + 10 AX switch
10	6 170 62	1 gang - 2 x 2P
10	6 170 63	1 gang - 2P+E
10	6 170 64 N	1 gang - 2 x 2P+E

Pack	Cat.Nos	US socket outlet - 15 A - 127 V~
10	6 170 65	1 gang - 2P+E
10	6 170 56	German standard socket outlet - 16 A - 250 V~ 1 gang - 2P+E with shutters for child protection
10	6 170 55	1 gang - 2P+E without shutters
10	6 170 67	Multistandard switched socket outlet 1 gang
4	6 170 69 N	2 gang

Belanko™

fused connection units, cable outlets, surface-mounting boxes, plates and blanking plates



6 170 81



6 170 85




6 171 31 + 6 170 42



6 133 50



6 171 55



6 171 51

Pack	Cat.Nos	
Fused connection units		
10	6 170 80	13 A Conform to BS 1363-4 Unswitched + cord outlet
10	6 170 81	Switched + cord outlet
10	6 170 82	Switched + neon + cord outlet
Cable outlets		
10	6 170 85	Conform to BS 5733 20 A - 250 V~
10	6 170 86	45 A - 250 V~
Fixing accessories		
100	6 171 30	Screw caps
2	6 171 31	Splash-proof cover Mainly for socket protection IP 44 with or without plug engaged Space inside : 86 x 86 mm (for Belanko, Mallia and Synergy products)
Surface-mounting boxes		
10	6 133 49	Conform to BS 5733 depth 35 mm Architrave surface box
8	6 133 50	1 gang surface box - 86 x 86 mm Supplied with earth terminal
4	6 133 51	2 gang surface box - 86 x 146 mm Supplied with earth terminal

Pack	Cat.Nos	
Plates		
5	6 171 50	1 gang - horizontal ● Beige ● Taupe
5	6 171 55	
5	6 171 51	1 gang - vertical ● Beige ● Taupe
5	6 171 56	
5	6 171 52	2 gang - horizontal ● Beige ● Taupe
5	6 171 57	
5	6 171 53	2 gang - vertical ● Beige ● Taupe
5	6 171 58	
Blanking plates		
10	6 171 28	Conform to BS 5733 1 gang
5	6 171 29	2 gang
Arteor adaptor		
10	6 171 32	1 gang

Belanko™ colours

single pole switches and push-buttons



6 173 00



6 174 00



6 173 11



6 174 16

Conform to BS EN 60669-1

Large rocker

Material: Thermoplastic with paint satin finish

Dimensions: 86 x 86 x 9.5 mm (1 gang) / 86 x 146 x 9.5 mm (2 gang)

Supplied with 2 screws M3.5 for BS boxes

Pack Cat.Nos Single pole switches 10 AX - 250 V~

Pack	Cat.Nos	Single pole switches 10 AX - 250 V~
10	6 173 00	1 gang - 1-way switch ● Dark grey ● Brown
10	6 174 00	
10	6 173 01	1 gang - 2-way switch ● Dark grey ● Brown
10	6 174 01	
10	6 173 02	2 gang - 1-way switch ● Dark grey ● Brown
10	6 174 02	
10	6 173 03	2 gang - 2-way switch ● Dark grey ● Brown
10	6 174 03	
10	6 173 04	3 gang - 1-way switch ● Dark grey ● Brown
10	6 174 04	
10	6 173 05	3 gang - 2-way switch ● Dark grey ● Brown
10	6 174 05	
10	6 173 06	4 gang - 1-way switch ● Dark grey ● Brown
10	6 174 06	
10	6 173 07	4 gang - 2-way switch ● Dark grey ● Brown
10	6 174 07	
10	6 173 09	Intermediate switch ● Dark grey ● Brown
10	6 174 09	

Pack Cat.Nos Push-buttons 4 A - 250 V~

Pack	Cat.Nos	Push-buttons 4 A - 250 V~
10	6 173 10	1 gang without mounting ● Dark grey ● Brown
10	6 174 10	
10	6 173 11	Bell push ● Dark grey ● Brown
10	6 174 11	
10	6 173 16	2 gang for electric shutters ● Dark grey ● Brown
10	6 174 16	

Belanko™ colours

double pole switches and cooker control unit



6 173 72



6 174 76

Material: Thermoplastic with paint satin finish
Dimensions: 86 x 86 x 9.5 mm (1 gang) / 86 x 146 x 9.5 mm (2 gang)
Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	Double pole switches 20 A - 250 V~
10 10	6 173 73 6 174 73	1 gang - 1-way switch ● Dark grey ● Brown
10 10	6 173 70 6 174 70	1 gang - 1-way switch + red neon indicator ● Dark grey ● Brown
10 10	6 173 71 6 174 71	1 gang - 1-way switch + red neon indicator + earth connection ● Dark grey ● Brown
10 10	6 173 72 6 174 72	1 gang - 1-way switch + red neon indicator + earth connection with "Water Heater" marking ● Dark grey ● Brown
10 10	6 173 74 6 174 74	Double pole switches 32 A - 250 V~ 1 gang - 1-way switch + red neon indicator ● Dark grey ● Brown
10 10	6 173 75 6 174 75	Double pole switches 45 A - 250 V~ 1 gang - 1-way switch ● Dark grey ● Brown
10 10	6 173 76 6 174 76	1 gang - 1-way switch + red neon indicator ● Dark grey ● Brown
10 10	6 173 77 6 174 77	2 gang - 1-way vertical switch + red neon indicator ● Dark grey ● Brown
5 5	6 173 78 6 174 78	Cooker control unit - 250 V 45 A double pole switch + red neon and 13 A BS switched socket outlet + red neon ● Dark grey ● Brown

Belanko™ colours

dimmers



6 173 35

Material: Thermoplastic with glossy finish or painting
Dimensions: 86 x 86 x 9.5 mm (1 gang) / 86 x 146 x 9.5 mm (2 gang)
Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	Dimmers
1 1	6 173 30 6 174 30	600 W RL dimmer Rotary on/off dimmer - 50 Hz 1 gang - 1-way 40-600 W (230 V) for incandescent and halogen lamps ● Dark grey ● Brown
1 1	6 173 31 6 174 31	1000 W RL dimmer Push on/off and rotary dimmer - 50/60 Hz 1 gang - 2-way 60-1000 W (230 V) / 60-500 W (127 V) for incandescent and halogen lamps 60-600 VA (230 V) / 60-300 VA (127 V) for halogen lamps with electronic transformer with leading edge behaviour 60-1000 VA (230 V) / 60-500 VA (127 V) for halogen lamps with ferromagnetic transformers Slider at the back to select 230 V or 127 V ● Dark grey ● Brown
1 1	6 173 35 6 174 35	300 W RLC+LED dimmer For all types of lamps: - dimmable LEDs: 5 W to 75 W (10 lamps max. 5 W to 37 W (127 V)) - dimmable compact fluorescent lamps: 5 W to 75 W (10 lamps max. 5 W to 37 W (127 V)) - halogen with ferromagnetic or electronic transformer: 5 VA to 300 VA / 5 VA to 150 VA (127 V) - fluorescent tube - ballast: 5 VA to 300 VA / 5 VA to 150 VA (127 V) - halogen and incandescent 240 VA: 5 W to 300 W / 5 W to 150 W (127 V) When switched on, gradually (2 seconds) lights up at the level set before last switch-off ● Dark grey ● Brown

Belanko™ colours

television, telephone and data sockets



Belanko™ colours

hotel equipment



6 173 93



6 174 91

Material: Thermoplastic with paint satin finish
Dimensions: 86 x 86 x 9.5 mm
Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	Television sockets
10 10	6 173 21 6 174 21	Single TV socket, female ● Dark grey ● Brown
10 10	6 173 20 6 174 20	Single TV socket, "F" type ● Dark grey ● Brown
10 10	6 173 23 6 174 23	Double TV socket, female + "F" type ● Dark grey ● Brown

Pack	Cat.Nos	Telephone sockets
10 10	6 173 95 6 174 95	BS master ● Dark grey ● Brown
10 10	6 173 96 6 174 96	BS secondary ● Dark grey ● Brown
10 10	6 173 97 6 174 97	RJ 11 socket ● Dark grey ● Brown
10 10	6 173 98 6 174 98	Double RJ 11 socket ● Dark grey ● Brown

Pack	Cat.Nos	Telephone + data sockets
10 10	6 173 93 6 174 93	RJ 11 + RJ 45 Cat.6 UTP socket ● Dark grey ● Brown

Pack	Cat.Nos	Data sockets
10 10	6 173 91 6 174 91	RJ 45 Cat.6 UTP ● Dark grey ● Brown
10 10	6 173 92 6 174 92	Double RJ 45 Cat.6 UTP ● Dark grey ● Brown



6 174 13

Material: Thermoplastic with paint satin finish
Dimensions: 86 x 86 x 9.5 mm (1 gang) / 86 x 146 x 9.5 mm (2 gang)
Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	Key card switch
1 1	6 173 12 6 174 12	Key card switch 16 A - 230 V - 50 Hz Time delay of approx. 30 s after card removal ● Dark grey ● Brown
10 10	6 173 13 6 174 13	Hotel bedrooms call indicators 2 settings : - Do not disturb - Please clean the room Indicator lamp + bell push Installed in the corridor, display calls ● Dark grey ● Brown
10 10	6 173 14 6 174 14	Internal control unit Installed in the room, allows the user to select the desired setting ● Dark grey ● Brown
1 1	6 173 68 6 174 68	Shaver sockets Conform to BS 61558 115/230 V - 20 VA - 50/60 Hz Surface or flush-mounting, back box to be min. 47 mm deep 2 gang ● Dark grey ● Brown

Belanko™ colours

socket outlets



6 174 41



6 173 40



6 174 48



6 173 58



6 174 57

Material: Thermoplastic with paint satin finish

Dimensions: 86 x 86 x 9.5 mm (1 gang) / 86 x 146 x 9.5 mm (2 gang). Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	British Standard socket outlets 13 A - 250 V~	Pack	Cat.Nos	British Standard socket outlets 13 A - 250 V~ with USB charger
10	6 173 41	1 gang single pole switched with external rocker Conform to BS 1363-2 ● Dark grey ● Brown	1	6 173 58	Conform to BS 1363-2:2016 Conform to IEC 60950-1 USB Type-A 2.4 A - 5 V _{DC} - 12 W Consumption in passive mode < 0.07 W 1 gang single pole switched ● Dark grey ● Brown
10	6 174 41		1	6 174 58	
5	6 173 46	2 gang single pole switched with inboard rockers ● Dark grey ● Brown	1	6 173 57	1 gang unswitched ● Dark grey ● Brown
5	6 174 46		1	6 174 57	
10	6 173 40	1 gang unswitched ● Dark grey ● Brown			
10	6 174 40				
5	6 173 45	2 gang unswitched ● Dark grey ● Brown			
5	6 174 45				
10	6 173 88	1 gang single pole switched ● Dark grey ● Brown			
10	6 174 88				
10	6 173 43	1 gang double pole switched ● Dark grey ● Brown			
10	6 174 43				
5	6 173 89	2 gang single pole switched ● Dark grey ● Brown			
5	6 174 89				
5	6 173 48	2 gang double pole switched ● Dark grey ● Brown			
5	6 174 48				
10	6 173 42	1 gang single pole switched + neon ● Dark grey ● Brown			
10	6 174 42				
5	6 173 47	2 gang single pole switched + neon ● Dark grey ● Brown			
5	6 174 47				
British Standard socket outlets 15 A - 250 V~ Conform to BS 546					
10	6 173 50	1 gang unswitched ● Dark grey ● Brown			
10	6 174 50				
10	6 173 51	1 gang single pole switched ● Dark grey ● Brown			
10	6 174 51				
10	6 173 52	1 gang single pole switched + neon ● Dark grey ● Brown			
10	6 174 52				
10	6 173 53	2 gang single pole switched ● Dark grey ● Brown			
10	6 174 53				
British Standard socket outlets 5 A - 250 V~ Conform to BS 546					
10	6 173 54	1 gang single pole switched ● Dark grey ● Brown			
10	6 174 54				

Belanko™ colours

socket outlets (continued)



6 173 69

Material: Thermoplastic with paint satin finish
Dimensions: 86 x 86 x 9.5 mm (1 gang) / 86 x 146 x 9.5 mm (2 gang)
Supplied with 2 screws M3.5 for BS boxes

Pack Cat.Nos Euro/US socket outlets - 10 A - 250 V~ / 15 A - 127 V~

Pack	Cat.Nos	1 gang - 2P + 10 A x switch
10	6 173 61	● Dark grey
10	6 174 61	● Brown



Pack	Cat.Nos	1 gang - 2 x 2P
10	6 173 62	● Dark grey
10	6 174 62	● Brown



Pack	Cat.Nos	1 gang - 2 x 2P+E
10	6 173 64	● Dark grey
10	6 174 64	● Brown



German Standard socket outlet 16 A - 250 V~

Pack	Cat.Nos	1 gang - 2P+E with shutters for child protection
10	6 173 56	● Dark grey
10	6 174 56	● Brown



Multistandard switched socket outlet

Pack	Cat.Nos	1 gang
10	6 173 67	● Dark grey
10	6 174 67	● Brown



Pack	Cat.Nos	2 gang
5	6 173 69	● Dark grey
5	6 174 69	● Brown



Belanko™ colours

fused connection units, cable outlets and blanking plates



6 173 86

Pack Cat.Nos Fused connection units 13 A

Pack	Cat.Nos	Unswitched + cord outlet
10	6 173 80	● Dark grey
10	6 174 80	● Brown



Pack	Cat.Nos	Switched + cord outlet
10	6 173 81	● Dark grey
10	6 174 81	● Brown



Pack	Cat.Nos	Switched + neon + cord outlet
10	6 173 82	● Dark grey
10	6 174 82	● Brown



Cable outlets

Pack	Cat.Nos	20 A - 250 V~
10	6 173 85	● Dark grey
10	6 174 85	● Brown



Pack	Cat.Nos	45 A - 250 V~
10	6 173 86	● Dark grey
10	6 174 86	● Brown



Blanking plates

Pack	Cat.Nos	1 gang
10	6 173 28	● Dark grey
10	6 174 28	● Brown



Pack	Cat.Nos	2 gang
5	6 173 29	● Dark grey
5	6 174 29	● Brown



Arteor Adaptor

Pack	Cat.Nos	1 gang
10	6 173 32	● Dark grey




WANT TO KNOW **MORE?**



FOR MORE INFORMATION ABOUT OUR SOLUTIONS,
PLEASE VISIT OUR WEBSITE: "**Please put your local web address**"



FOLLOW US ON

-  www.legrand.com
-  www.youtube.com/user/Legrand
-  www.facebook.com/Legrand
-  twitter.com/Legrand
-  pinterest.com/legrandgroup

EXB17010 - March 2017



Head Office and International Department

128, av. du Maréchal-de-Lattre-de-Tassigny
87045 Limoges Cedex - France

☎ : + 33 (0) 5 55 06 87 87

Fax : + 33 (0) 5 55 06 74 55